



Асинхронные двигатели серии 5AM

Габаритные, установочные и присоединительные размеры

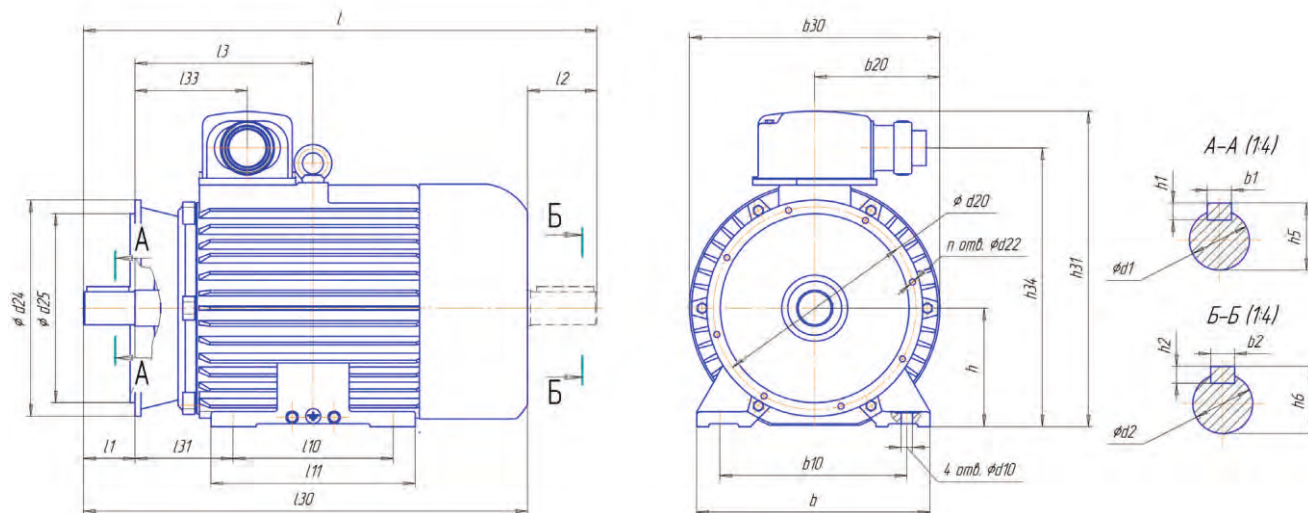


Электродвигатели серии 5AM.
5AM-200, 5AM-250
IM 2001, IM 2002. Низковольтные.

Тип	L, мм	l1, мм	l2, мм	l3, мм	l10, мм	l11, мм	l30, мм	l33, мм	l31, мм	b, мм	b1, мм	b2, мм	b10, мм	b20, мм	b30, мм
5AM-200M-2	846	110	110	155	267	340	730	396	133	395	16	16	318	165	410
5AM-200L-2	892	110	110	155	305	390	780	446	133	395	16	16	318	165	410
5AM-200M-4	876	140	110	155	267	340	760	426	133	395	18	18	318	165	410
5AM-200L-4	922	140	110	155	305	390	810	476	133	395	16	16	318	165	410
5AM-250S-2	1030	140	140	190	311	390	880	463	168	490	18	18	406	165	550
5AM-250M-2	1070	140	140	190	349	430	920	483	168	490	18	18	406	165	550
5AM-250S-4	1030	140	140	190	311	390	880	463	168	490	20	20	406	165	550
5AM-250M-4	1070	140	140	190	349	430	920	483	168	490	20	20	406	165	550
5AM-250S-6	1030	140	140	190	311	390	880	463	168	490	20	20	406	165	550
5AM-250M-6	1070	140	140	190	349	430	920	483	168	490	20	20	406	165	550
5AM-250S-8	1030	140	140	190	311	390	880	463	168	490	20	20	406	165	550
5AM-250M-8	1070	140	140	190	349	430	920	483	168	490	20	20	406	165	550
5AM-250S-10	1030	140	140	190	311	390	880	463	168	490	20	20	406	165	550
Тип	h, мм	h1, мм	h2, мм	h5, мм	h6, мм	h31, мм	h34, мм	d1, мм	d2, мм	d10, мм	d24, мм	d20, мм	d25, мм	nxd22	
5AM-200M-2	200	10	10	59	59	465	525	55	55	19	—	—	—	—	—
5AM-200L-2	200	10	10	59	59	465	525	55	55	19	—	—	—	—	—
5AM-200M-4	200	10	10	64	59	465	525	55	55	19	—	—	—	—	—
5AM-200L-4	200	10	10	64	59	465	525	55	55	19	—	—	—	—	—
5AM-250S-2	250	11	11	69	69	525	615	65	65	24	450	500	550	8x19	—
5AM-250M-2	250	11	11	69	69	525	615	65	65	24	450	500	550	8x19	—
5AM-250S-4	250	12	12	79,5	74,5	525	615	75	70	24	450	500	550	8x19	—
5AM-250M-4	250	12	12	79,5	74,5	525	615	75	70	24	450	500	550	8x19	—
5AM-250S-6	250	12	12	79,5	74,5	525	615	75	70	24	450	500	550	8x19	—
5AM-250M-6	250	12	12	79,5	74,5	525	615	75	70	24	450	500	550	8x19	—
5AM-250S-8	250	12	12	79,5	74,5	525	615	75	70	24	450	500	550	8x19	—
5AM-250M-8	250	12	12	79,5	74,5	525	615	75	70	24	450	500	550	8x19	—
5AM-250S-10	250	12	12	79,5	74,5	525	615	75	70	24	450	500	550	8x19	—

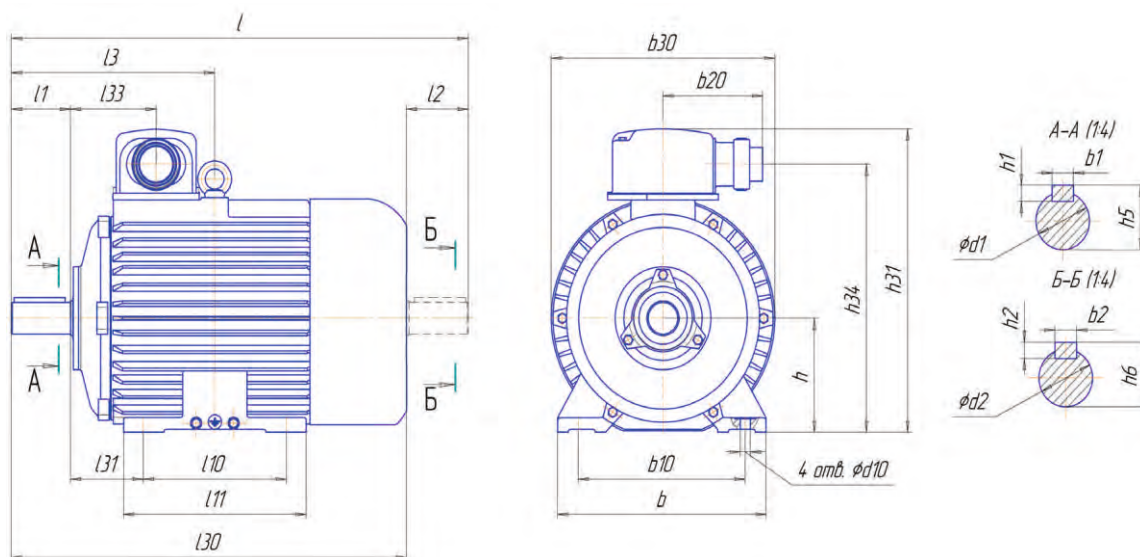


Электродвигатели серии 5AM.
5AM-200, 5AM-250. IM 1001, IM 1002. Низковольтные.

Тип	l, мм	l1, мм	l2, мм	l33, мм	l10, мм	l11, мм	l30, мм	l3, мм	l31, мм	b, мм	b1, мм	b2, мм	b10, мм
5AM-200M-2	846	110	110	155	267	340	730	396	133	395	16	16	318
5AM-200L-2	892	110	110	155	305	390	780	446	133	395	16	16	318
5AM-200M-4	876	140	110	155	267	340	760	426	133	395	18	16	318
5AM-200L-4	922	140	110	155	305	390	810	476	133	395	18	16	318
5AM-200M-6	876	110	110	155	267	340	760	426	133	395	18	16	318
5AM-200L-6	922	110	110	155	305	390	810	476	133	395	18	16	318
5AM-200M-8	876	140	110	155	267	340	760	426	133	395	18	16	318
5AM-200L-8	922	140	110	155	305	390	810	476	133	395	18	16	318
5AM-225M-2	895	110	110	220	286	366	785	420	149	436	16	16	356
5AM-225M-4	935	140	140	220	286	366	815	420	149	436	18	18	356
5AM-225M-6	935	140	140	220	286	366	815	420	149	436	18	18	356
5AM-225M-8	935	140	140	220	286	366	815	420	149	436	18	18	356
5AM-250S-2	1035	140	140	225	311	390	895	371	168	490	20	18	406
5AM-250M-2	1075	140	140	225	349	430	935	391	168	490	20	18	406
5AM-250S-4	1035	140	140	225	311	390	895	371	168	490	20	18	406
5AM-250M-4	1075	140	140	225	349	430	935	391	168	490	20	18	406
5AM-250S-6	1035	140	140	225	311	390	895	371	168	490	20	18	406
5AM-250M-6	1075	140	140	225	349	430	935	391	168	490	20	18	406
5AM-250S-8	1035	140	140	225	311	390	895	371	168	490	20	18	406
5AM-250M-8	1075	140	140	225	349	430	930	391	168	490	20	18	406
5AM-250S-10	1035	140	140	225	311	390	895	371	168	490	20	18	406
Тип	b20, мм	b30, мм	h, мм	h1, мм	h2, мм	h5, мм	h6, мм	h31, мм	h34, мм	d1, мм	d2, мм	d10, мм	–
5AM-200M-2	165	410	200	10	10	59	59	525	465	55	55	19	–
5AM-200L-2	165	410	200	10	10	59	59	525	465	55	55	19	–
5AM-200M-4	165	410	200	11	10	59	59	525	465	60	55	19	–
5AM-200L-4	165	410	200	11	10	59	59	525	465	60	55	19	–
5AM-200M-6	165	410	200	11	10	59	59	525	465	60	55	19	–
5AM-200L-6	165	410	200	11	10	59	59	525	465	60	55	19	–
5AM-200M-8	165	410	200	11	10	59	59	525	465	60	55	19	–
5AM-200L-8	165	410	200	11	10	59	59	525	465	60	55	19	–
5AM-225M-2	230	456	225	10	–	59	59	570	450	55	55	19	–
5AM-225M-4	230	456	225	11	–	64	64	570	450	65	65	19	–
5AM-225M-6	230	456	225	11	–	64	64	570	450	65	65	19	–
5AM-225M-8	230	456	225	11	–	64	64	570	450	65	65	19	–
5AM-250S-2	–	545	250	7,5	–	82,5	–	615	557,5	75	–	24	–
5AM-250M-2	–	545	250	7,5	–	82,5	–	615	558	75	–	24	–
5AM-250S-4	–	545	250	7,5	–	82,5	–	615	558	75	–	24	–
5AM-250M-4	–	545	250	7,5	–	82,5	–	615	557,5	75	–	24	–
5AM-250S-6	–	545	250	7,5	–	82,5	–	615	557,5	75	–	24	–
5AM-250M-6	–	545	250	7,5	–	82,5	–	615	558	75	–	24	–
5AM-250S-8	–	545	250	7,5	–	82,5	–	615	558	75	–	24	–
5AM-250M-8	–	545	250	7,5	–	82,5	–	615	558	75	–	24	–
5AM-250S-10	–	545	250	7,5	–	82,5	–	615	557,5	75	–	24	–

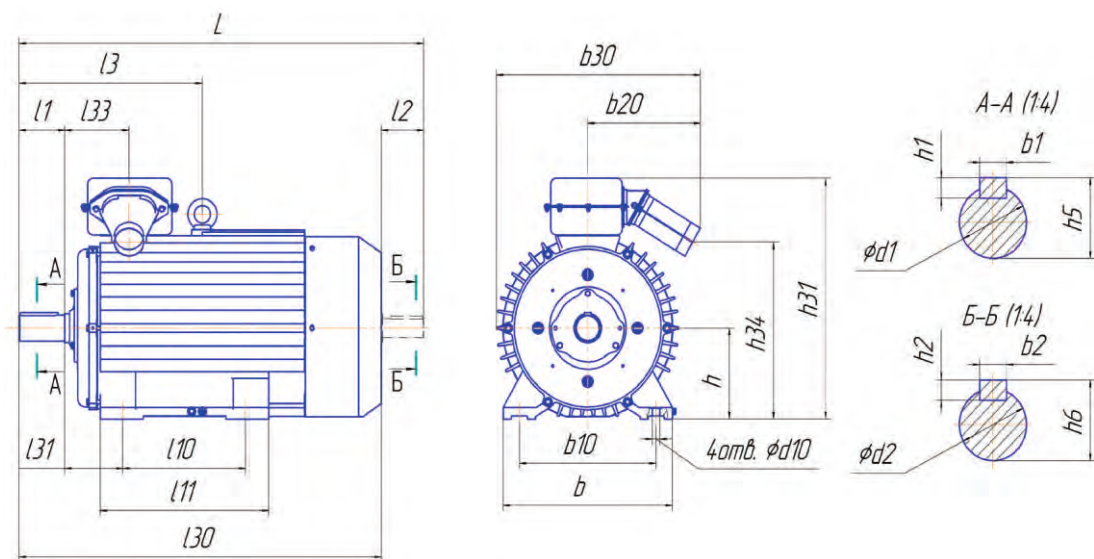


Электродвигатели серии 5AM.
5AM-315. IM 1001, IM 1002. Низковольтные.

Тип	L, мм	l1, мм	l2, мм	l3, мм	l10, мм	l11, мм	l30, мм	l33, мм	l31, мм	b, мм	b1, мм	b2, мм	b10, мм
5AM-315S-4	1455	170	140	682	406	575	1300	239	216	630	25	25	508
5AM-315M-4	1505	170	140	682	457	625	1350	239	216	630	25	25	508
5AM-315S-6	1455	170	140	682	406	575	1300	239	216	630	25	25	508
5AM-315M-6	1505	170	140	682	457	625	1350	239	216	630	25	25	508
5AM-315S-8	1455	170	140	682	406	575	1300	239	216	630	25	25	508
5AM-315M-8	1505	170	140	682	457	625	1350	239	216	630	25	25	508
5AM-315S-10	1455	170	140	682	406	575	1300	239	216	630	25	25	508
5AM-315M-10	1505	170	140	682	457	625	1350	239	216	630	25	25	508
5AM-315S-12	1455	170	140	682	406	575	1300	239	216	630	25	25	508
5AM-315M-12	1505	170	140	682	457	625	1350	239	216	630	25	25	508
Тип	b20, мм	b30, мм	h, мм	h1, мм	h2, мм	h5, мм	h6, мм	h31, мм	h34, мм	d1, мм	d2, мм	d10, мм	–
5AM-315S-4	420	680	315	14	14	95,0	95	850	615	90	90	30	–
5AM-315M-4	420	680	315	14	14	95,0	95	850	615	90	90	31	–
5AM-315S-6	420	680	315	14	14	95,0	95	850	615	90	90	32	–
5AM-315M-6	420	680	315	14	14	95,0	95	850	615	90	90	33	–
5AM-315S-8	420	680	315	14	14	95,0	95	850	615	90	90	34	–
5AM-315M-8	420	680	315	14	14	95,0	95	850	615	90	90	35	–
5AM-315S-10	420	680	315	14	14	95,0	95	850	615	90	90	36	–
5AM-315M-10	420	680	315	14	14	95,0	95	850	615	90	90	37	–
5AM-315S-12	420	680	315	14	14	95,0	95	850	615	90	90	38	–
5AM-315M-12	420	680	315	14	14	95,0	95	850	615	90	90	39	–

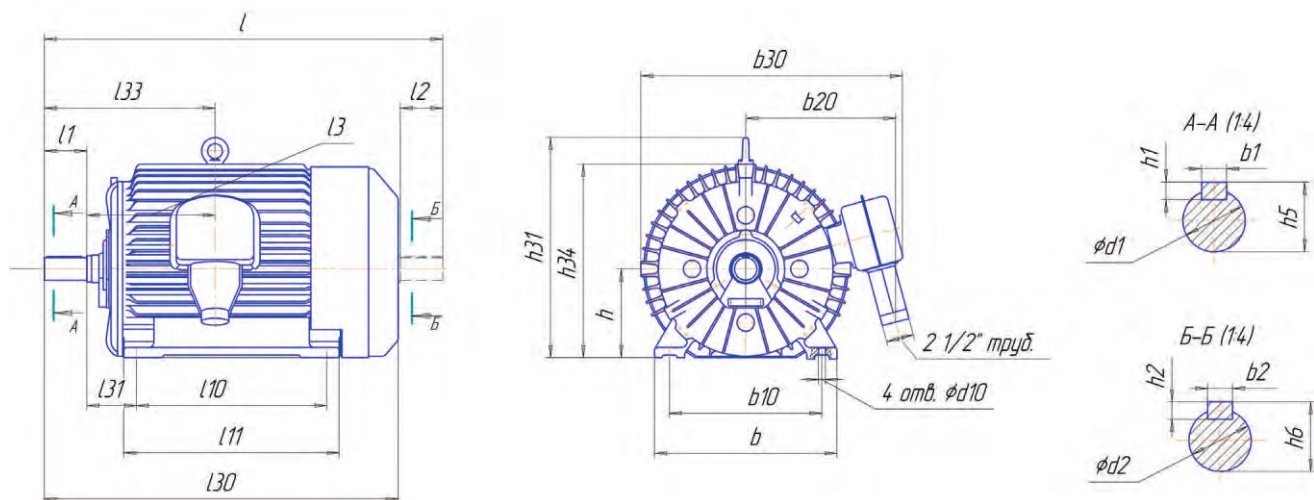


Электродвигатели серии 5AM.
5AM-280. IM 1001, IM 1002. Низковольтные

Тип	L, мм	l1, мм	l2, мм	l3, мм	l10, мм	l11, мм	l30, мм	l33, мм	l31, мм	b, мм	b1, мм	b2, мм	b10, мм
5AM-280S-2	1116	110	110	374	368	460	970	514	190	547	20	18	457
5AM-280M-2	1167	110	110	374	419	460	970	514	190	547	20	18	457
5AM-280S-4	1116	140	110	374	368	460	970	514	190	547	20	18	457
5AM-280M-4	1167	140	110	400	419	510	1025	540	190	547	20	18	457
5AM-280S-6	1116	140	140	374	368	460	970	514	190	547	20	18	457
5AM-280M-6	1167	140	140	400	419	510	1025	540	190	547	20	18	457
5AM-280S-8	1116	140	140	374	368	460	970	514	190	547	20	18	457
5AM-280M-8	1167	140	140	400	419	510	1025	540	190	547	20	18	457
5AM-280S-10	1116	140	140	374	368	460	970	514	190	547	20	18	457
5AM-280M-10	1167	140	140	400	419	510	1025	540	190	547	20	18	457
Тип	b20, мм	b30, мм	h, мм	h1, мм	h2, мм	h5, мм	h6, мм	h31, мм	h34, мм	d1, мм	d2, мм	d10, мм	-
5AM-280S-2	358	684	280	12	12	74,5	64	622	552	65	65	24	-
5AM-280M-2	358	684	280	12	12	74,5	64	622	552	65	65	24	-
5AM-280S-4	358	684	280	12	12	74,5	64	622	552	75	75	24	-
5AM-280M-4	358	684	280	12	12	74,5	64	622	552	75	75	24	-
5AM-280S-6	358	684	280	12	12	74,5	64	622	552	75	75	24	-
5AM-280M-6	358	684	280	12	12	74,5	64	622	552	75	75	24	-
5AM-280S-8	358	684	280	12	12	74,5	64	622	552	75	75	24	-
5AM-280M-8	358	684	280	12	12	74,5	64	622	552	75	75	24	-
5AM-280S-10	358	684	280	12	12	74,5	64	622	552	75	75	24	-
5AM-280M-10	358	684	280	12	12	74,5	64	622	552	75	75	24	-

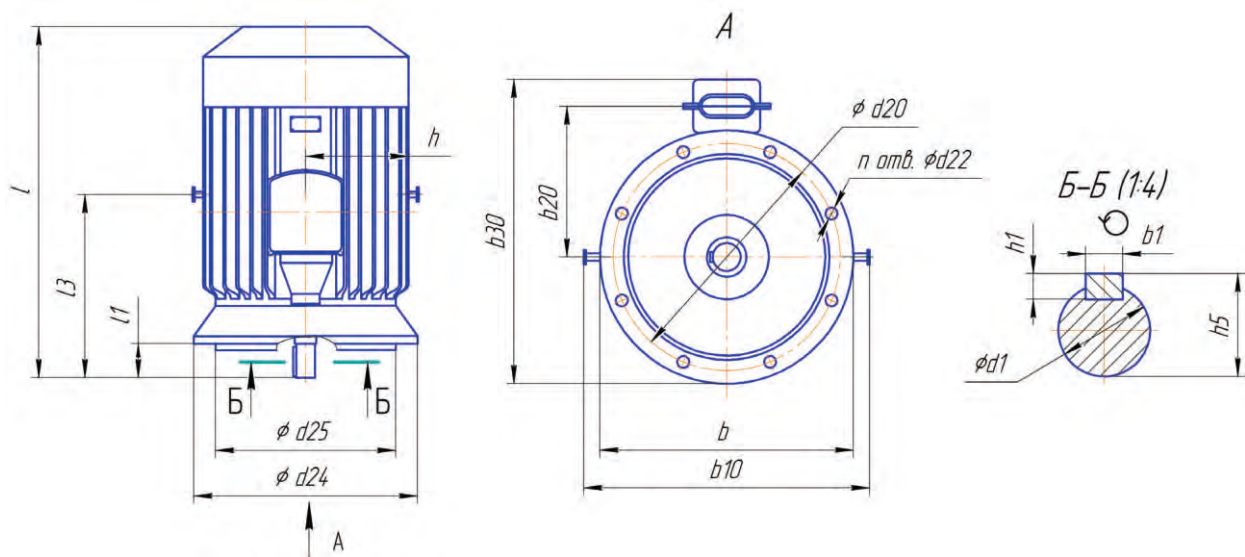


Электродвигатели серии 5АМ.
5АМ-280. IM 3011. Низковольтные.

Тип	L, мм	l1, мм	l3, мм	b, мм	b1, мм	b10, мм	b20, мм	b30, мм	h, мм	h1, мм	h5, мм	d1, мм	d24, мм	d20, мм	d25, мм	n×d22
5AM-280S-4	970	140	374	584	20	660	358	684	292	12	74,5	65	300	350	400	4×19
5AM-280M-4	1025	140	399,5	584	20	660	358	684	292	12	74,5	65	300	350	400	4×19
5AM-280S-6	970	140	374	584	20	660	358	684	292	12	74,5	75	300	350	400	4×19
5AM-280M-6	1025	140	399,5	584	20	660	358	684	292	12	74,5	75	300	350	400	4×19
5AM-280S-8	970	140	374	584	20	660	358	684	292	12	74,5	75	300	350	400	4×19
5AM-280M-8	1025	140	399,5	584	20	660	358	684	292	12	74,5	75	300	350	400	4×19
5AM-280S-10	970	140	374	584	20	660	358	684	292	12	74,5	75	300	350	400	4×19
5AM-280M-10	1025	140	399,5	584	20	660	358	684	292	12	74,5	75	300	350	400	4×19

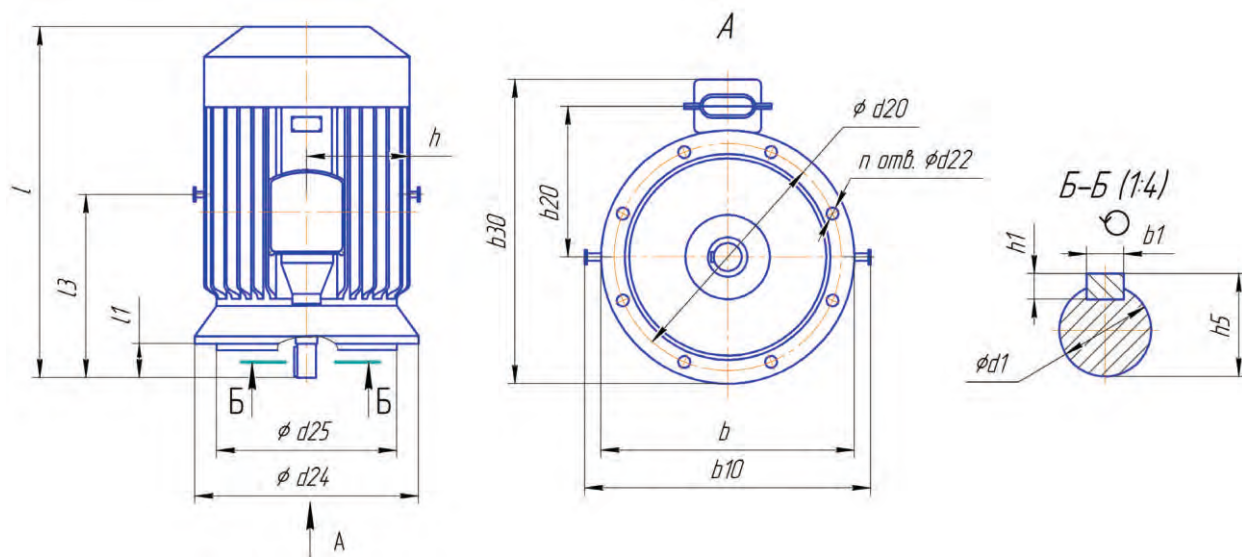

Электродвигатели серии 5АМ.
5АМ-280. IM 3011. Низковольтные.


Тип	L, мм	L1, мм	L3, мм	b, мм	b1, мм	b10, мм	b20, мм	b30, мм	h, мм	h1, мм	h5, мм	d1, мм	d24, мм	d20, мм	d25, мм	nxd22
5АМ-280S-4	970	140	374	584	20	660	358	684	292	12	74,5	65	300	350	400	4x19
5АМ-280M-4	1025	140	399,5	584	20	660	358	684	292	12	74,5	65	300	350	400	4x19
5АМ-280S-6	970	140	374	584	20	660	358	684	292	12	74,5	75	300	350	400	4x19
5АМ-280M-6	1025	140	399,5	584	20	660	358	684	292	12	74,5	75	300	350	400	4x19
5АМ-280S-8	970	140	374	584	20	660	358	684	292	12	74,5	75	300	350	400	4x19
5АМ-280M-8	1025	140	399,5	584	20	660	358	684	292	12	74,5	75	300	350	400	4x19
5АМ-280S-10	970	140	374	584	20	660	358	684	292	12	74,5	75	300	350	400	4x19
5АМ-280M-10	1025	140	399,5	584	20	660	358	684	292	12	74,5	75	300	350	400	4x19

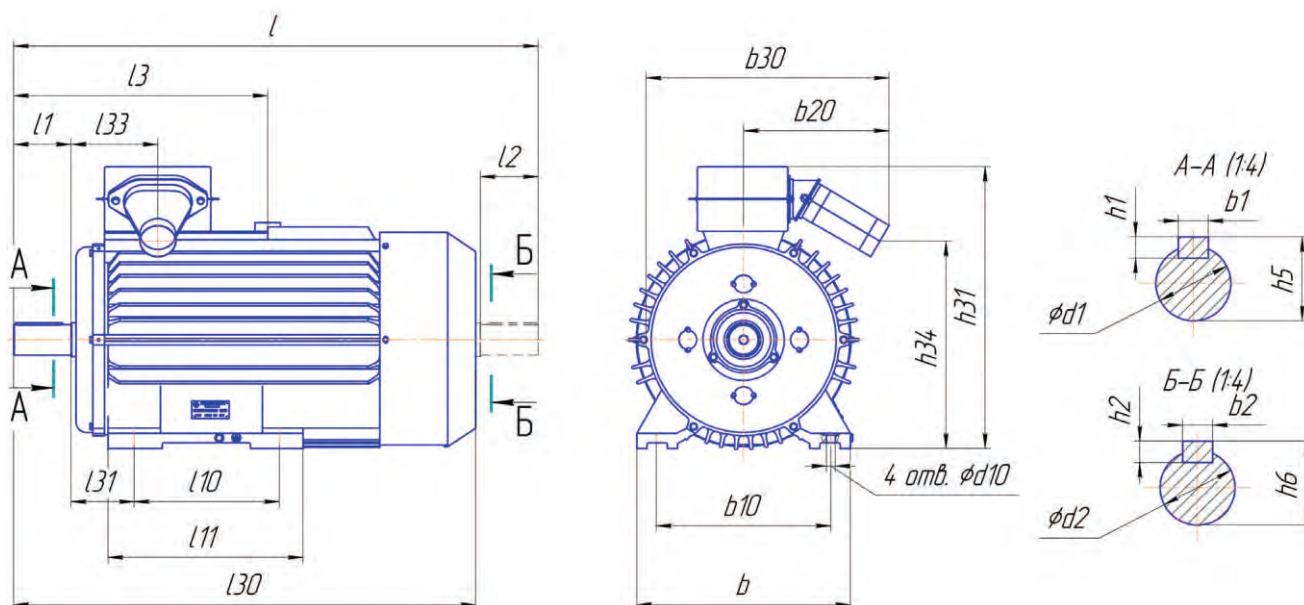

Электродвигатели серии 5AM.
5AM-355. IM 1001 IM 1002. Низковольтные.

Тип	l1, мм	l2, мм	l3, мм	l10, мм	l11, мм	l30, мм	l31, мм	l33, мм	b, мм	b1, мм	b2, мм	b10, мм
5AM-355L-4	210	210	310	800	900	1530	224	295	730	28	28	630
5AM-355M-6	210	210	310	710	810	1440	224	295	730	28	28	630
5AM-355L-6	210	210	310	800	900	1530	224	295	730	28	28	630
5AM-355M-8	210	210	310	710	810	1440	224	295	730	28	28	630
5AM-355L-8	210	210	310	800	900	1530	224	295	730	28	28	630
5AM-355S-10	210	210	310	560	730	1330	224	295	730	28	28	630
5AM-355M-10	210	210	310	710	810	1440	224	295	730	28	28	630
5AM-355L-10	210	210	310	800	900	1530	224	295	730	28	28	630
5AM-355S-12	210	210	310	560	730	1330	224	295	730	28	28	630
5AM-355M-12	210	210	310	710	810	1440	224	295	730	28	28	630
Тип	b20, мм	b30, мм	h, мм	h1, мм	h2, мм	h5, мм	h6, мм	h31, мм	h34, мм	d1, мм	d2, мм	d10, мм
5AM-355L-4	420	700	355	16	16	106	106	950	750	100	100	28
5AM-355M-6	420	700	355	16	16	106	106	950	750	100	100	28
5AM-355L-6	420	700	355	16	16	106	106	950	750	100	100	28
5AM-355M-8	420	700	355	16	16	106	106	950	750	100	100	28
5AM-355L-8	420	700	355	16	16	106	106	950	750	100	100	28
5AM-355S-10	420	700	355	16	16	106	106	950	750	100	100	28
5AM-355M-10	420	700	355	16	16	106	106	950	750	100	100	28
5AM-355L-10	420	700	355	16	16	106	106	950	750	100	100	28
5AM-355S-12	420	700	355	16	16	106	106	950	750	100	100	28
5AM-355M-12	420	700	355	16	16	106	106	950	750	100	100	28

ЗАКАЗАТЬ: 5AM низковольтные электродвигатели

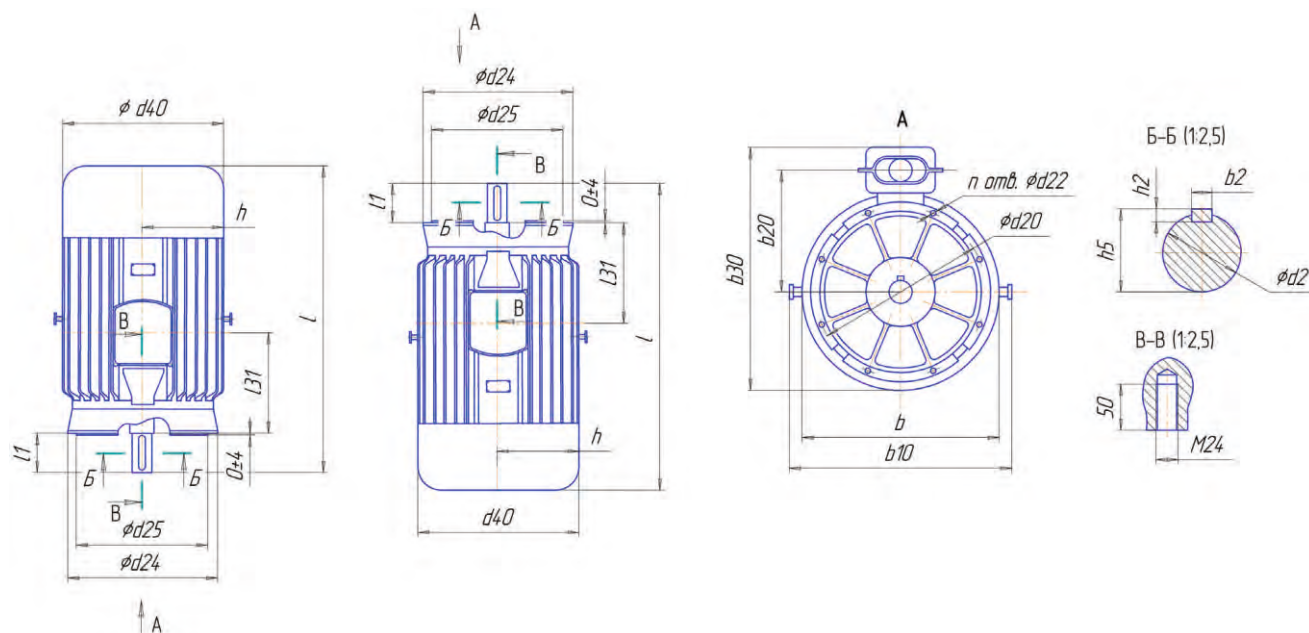

Электродвигатели серии 5AM.
5AM-355. IM 3011, IM 3031. Низковольтные

Электродвигатели серии 5AM.
5AM-355. IM 3011, IM 3031.
Низковольтные

Тип	L, мм	l1, мм	l3, мм	l31, мм	b, мм	b2, мм	b10, мм	b20, мм	b30, мм	h, мм	h2, мм	h6, мм	d1, мм	d2, мм	d10, мм	d20, мм	d30, мм	n×d22
5AM-355M-4	1370	210	153	720	855	22	965	528	1055	355	14	90	24	85	680	740	800	8×24
5AM-355S-6	1330	170	153	680	855	22	965	528	1055	355	14	90	24	85	680	740	800	8×24
5AM-355M-6	1370	210	153	720	855	22	965	528	1055	355	14	90	24	85	680	740	800	8×24
5AM-355L-6	1470	210	203	770	855	22	965	528	1055	355	14	90	24	85	680	740	800	8×24

Электродвигатели серии 5AM.
5AM-355. IM 3011. Низковольтные.

Тип	L, мм	l1, мм	l3, мм	l31, мм	b, мм	b2, мм	b10, мм	b20, мм	b30, мм	h, мм	h2, мм	h6, мм	d1, мм	d2, мм	d10, мм	d20, мм	d30, мм	n×d22
5AM-355M-4	1330	170	293	680	855	22	965	528	1055	355	14	90	24	85	680	740	800	8×24
5AM-355S-6	1330	170	293	680	855	22	965	528	1055	355	14	90	24	85	680	740	800	8×24
5AM-355M-6	1330	170	293	680	855	22	965	528	1055	355	14	90	24	85	680	740	800	8×24
5AM-355L-6	1430	170	343	730	855	22	965	528	1055	355	14	90	24	85	680	740	800	8×24