


АДМ1П электродвигатели для привода осевых вентиляторов с глухим щитом.  
Габаритные и присоединительные размеры.

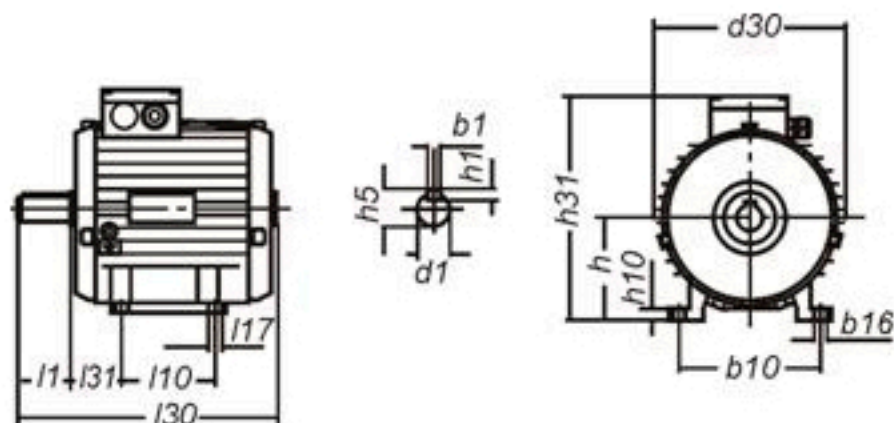

Тип	Установочно - присоединительные										Габаритные				
	По валу					По лапам									
	$l1$	$d1$	$h1$	$b1$	$h5$	$l31$	$l10$	$b10$	$l17$	$b16$	$l30$	$d30$	$h31$	$h10$	$h$
АДМ1П 63	30	14	5	5	16,0	40	80	100	7,0	7	201	135,0	154,0	7	63
АДМ1П 71	40	19	6	6	21,5	45	90	112	7,0	10	236	163,0	188,0	8	71
АДМ1П 80А	50	22	6	6	24,5	50	100	125	10,0	12	264	180,0	205,0	9	80
АДМ1П 80В	50	22	6	6	24,5	50	100	125	10,0	12	289	180,0	205,0	9	80
АДМ1П 90	50	24	7	8	27,0	56	125	140	10,0	14	289	180,0	215,0	10	90
АДМ1П 100S	60	28	7	8	31,0	63	112	160	12,5	16	320	226,0	246,5	12	100
АДМ1П 100L	60	28	7	8	31,0	63	140	160	12,5	16	341	226,0	246,5	12	100
АДМ1П 112	80	32	8	10	35,0	70	140	190	12,5	16	395	252,0	275,0	14	112
ИММ1П 71	30	14	5	5	16,0	45	90	112	7,0	7	201	135,0	162,0	7	71
ИММ1П 80	40	19	6	6	21,5	50	100	125	10,0	14	236	163,0	197,0	9	80
ИММ1П 90S	50	24	7	8	27,0	56	100	140	10,0	14	264	180,0	215,0	10	90
ИММ1П 90L	50	24	7	8	27,0	56	125	140	10,0	14	289	180,0	215,0	10	90
ИММ1П 100	60	28	7	8	31,0	63	140	160	12,0	16	315	226,0	246,5	12	100
ИММ1П 112	60	28	7	8	31,0	70	140	190	12,0	16	341	226,0	258,5	12	112
ИММ1П 132S	80	38	8	10	41,0	89	140	216	12,5	16	395	252,0	295,0	16	132
ИММ1П 132M	80	38	8	10	41,0	89	178	216	12,5	16	435	252,0	295,0	16	132

Присоединительные размеры по фланцам соответствуют размерам фланцев общепромышленных двигателей.